


[Sample_SRC_BASIS_Components_BAPI_E] Explanatory Material

[SRC_USER_ROLE_REGISTER_v2.2_E]

1. Overview

Perform user registration and role registration.

2. Function Image Overview

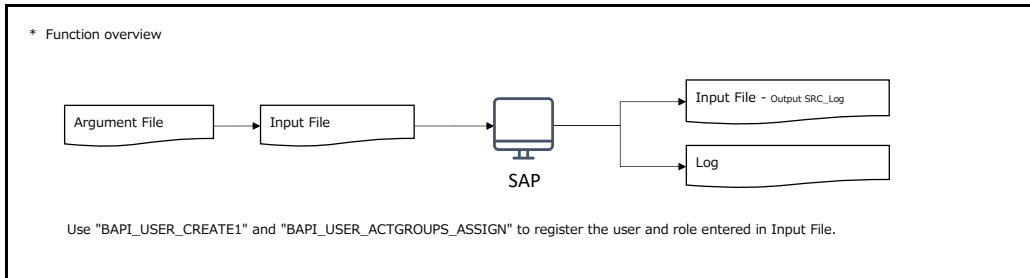

3. How to Use

Overview

Enter the registered user information (including roles) in Input File.

The following Argument information must be entered in Argument File.
(Please input all Argument File as String)

Sheet : Settings

Property	Description	Required
BAPIName	Function module name to execute (BAPI name)	Yes
InputFilePath	Input File save destination and file name (Set a relative or full path.)	Yes
CallWorkflowPath	Workflow save destination and file name for each BAPI (Set a relative or full path.)	Yes
DataCountSheet	Worksheet name of header data (worksheet where key items of input data are registered)	Yes
Client	Client information for SAP connection	
Language	SAP connection language (EN: English, JA: Japanese)	
SncLibraryPath	Absolute path of SNC shared library used for SAP connection	
SncMode	Determine if the connection to SAP is protected by SNC. (0 : Do not use SNC, 1 : Use SNC)	
SncPartnerName	ID used for the destination server, if required by the SNC solution.	
SncQOP	Quality of service level used for SNC communication on the destination server. (1 : Authentication only, 2 : Integrity protection, 3 : Privacy protection, 8 : Default, 9 : Maximum security)	
SncSSO	Credentials when using SNC (0 : Login with user / password, 1 : Login with SNC ID)	
AdvancedParameters	A semicolon-separated list of name / value pairs for additional RFC configuration parameters.	
AppServer	SAP Application Server host name.	
LogonGroup	Logon group from which the message server selects the application server	
MessageServer	The host name of the central instance message server in the SAP system.	
SAPRouter	SAP router used to establish connection.	
StatefulConnection	Decide whether to establish a stateful connection, defaults to True. (True, False)	
SystemID	3-character system ID of the SAP system	
SystemNumber	SAP system number	
Commit	Commit execution flag (X: Commit is executed, other than X: Commit is not executed) (Because this function is committed inside BAPI, it will be committed even if this flag is deleted.)	Not used in this sample
LogFolderPath	Log data file save destination (Set a relative or full path.)	Yes
LogFileName	Log data file name	
LogType	Output type of log data (TEXT: text, EXCEL: Excel)	Yes
LogOutputLine	Number of output to Excel	Yes

In CheckRequiredfield.xml, check logic for required items is included, but please add logic if necessary.

(In order to support single sign-on, the mandatory check of user ID and password, which was mandatory check in the previous version, has been deleted)

Sheet : Option

Sheet for managing information for use with individual BAPIs.

Property	Description	Required
BAPIUser	Authorization check (AUTHORITY_CHECK) BAPI user name at execution (Blank: Do not perform authorization check, otherwise: Perform authorization check)	
PasswordSuffix	Suffix given to password when executing password change (BAPI_USER_CHANGE) #DATE# : yyyyMMdd is assigned #RANDOM# : random number is assigned Other character : choose value is assigned	Not used in this sample

4. Important

To avoid any incorrect data registration, please check the maximum input length for User Name and others, as even if the data exceeds the maximum input length, no error is output from "BAPI_USER_CREATE1", and data will be registered with the maximum possible input length, excluding the exceeding value.

(Ex. : USERNAME = 12 characters

TEST_USER_001(13 characters) -> TEST_USER_00 (12 characters) will be registered.